



# XCS 製品登録ガイド



## 目次


---

1. ユーザー・プロフィールを作成するには？ .....	2
2. 製品を登録するには？ .....	11
3. ライセンス・キーを有効化するには？ .....	17
4. フィーチャー・キーを使用するには？ .....	22
5. クイックセットアップガイド.....	23
I : デバイスへの接続.....	23
II : デフォルトネットワークセッティング.....	24
III : インストールウィザード.....	24

# 1. ユーザー・プロフィールを作成するには？

## STEP 1

http://www.watchguard.com/activate/ にアクセスし、 **create a user profile** (ユーザー・プロフィールを作成する) をクリックします。

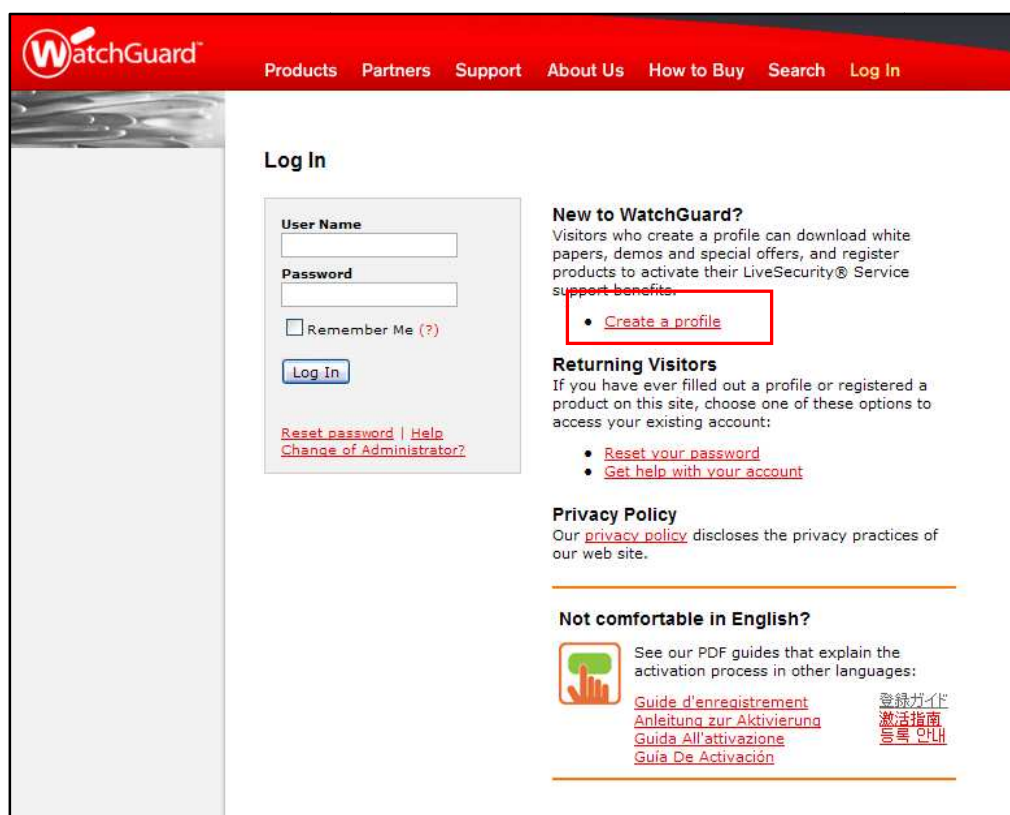

## STEP 2

ページ上方にあるドロップダウン・メニューから国名を選択し、もっとも近いカスタマー・タイプを選んで下さい。オプションは次の通りです。

- I am a Channel Partner or Reseller (チャンネル・パートナー又はリセラー)
- I am a Business End-User or Customer (ビジネス・エンドユーザー又はカスタマー)
- Neither option describes me (どちらでもない)

カスタマー・タイプを選択したら、その下にある **Continue** (続行) をクリックして、次のステップに進んで下さい。

The screenshot shows the WatchGuard registration page. At the top, there is a navigation bar with links for Products, Partners, Support, About Us, How to Buy, Search, and Log In. Below this, there are links for Register, Update Profile, and Reset Password. The main content area is titled 'Your WatchGuard Profile'. On the left, there is a 'Log In »' button and a box that says 'Don't have an Account? Create One Now'. The 'New Visitors' section contains a 'Choose your country:' dropdown menu with 'Select One' as the current selection, which is highlighted with a red box. Below this, there are three radio button options: 'I am a Channel Partner or Reseller.', 'I am a Business End User or Customer.', and 'Neither option describes me.'. To the right, the 'Returning Visitors' section provides instructions and links for 'Log in', 'Reset your password', and 'Get help with your account'. A 'Continue' button is located at the bottom of the form.

## STEP 3

このページは、**Contact Information**（連絡先）、**About Your Company**（企業情報）、**User Name and Password**（ユーザー名&パスワード）と、3つのセクションに分かれています。

**Contact Information**（連絡先）のセクションでは、次の情報を入力して下さい。

First Name（名）

Last Name（姓）

Company Name（企業名）

Company Address Line 1（企業住所）

Company Address Line 2（企業住所）

City（都道府県）


Province（地方）

Country（国名）

Postal Code（郵便番号）

Email Address（メール・アドレス）

Phone Number（電話番号）

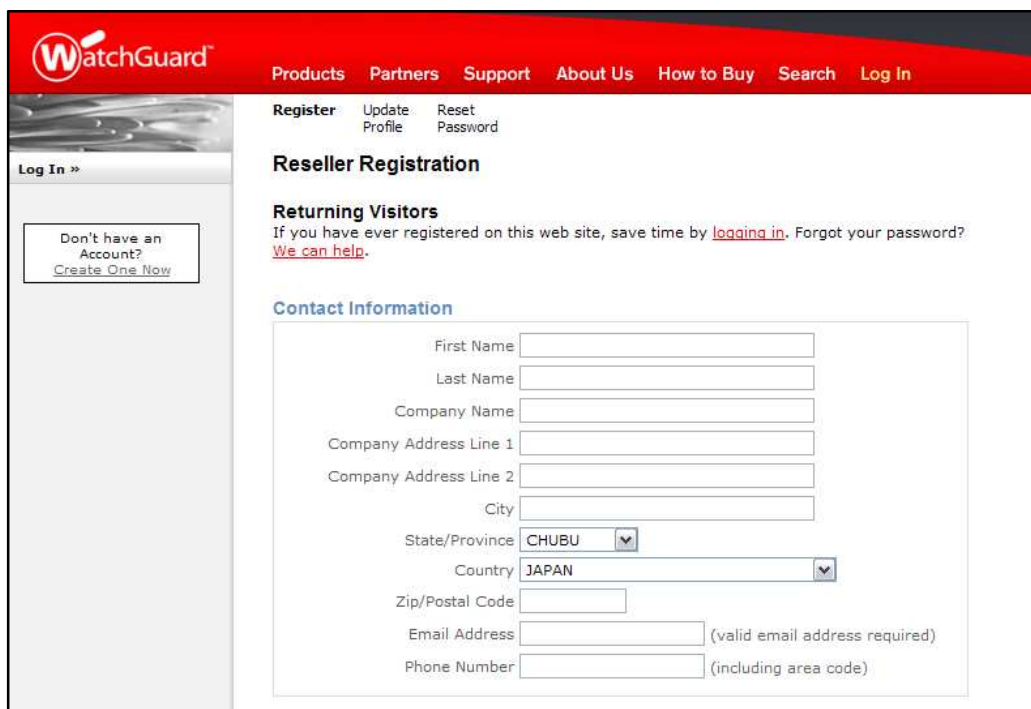

**About Your Company** (企業情報) のセクションでは、次の情報を入力して下さい。

How many people work at your company?

(御社の社員数を教えて下さい)

How many office locations does your company have?

(御社の本社・支社数を教えて下さい)

What is your company's primary business focus?

(御社の主なビジネス目的を教えてください)

Which of the following most closely describes your job title?


(御自分の職種にもっとも近いものを選んで下さい)

Which role do you play in the purchase of network security products at your company?

(セキュリティ製品の購入を検討する際、どのような役割を担っていますか?)

How did you learn about WatchGuard?

(ウォッチガードについてはどこで知りましたか?)

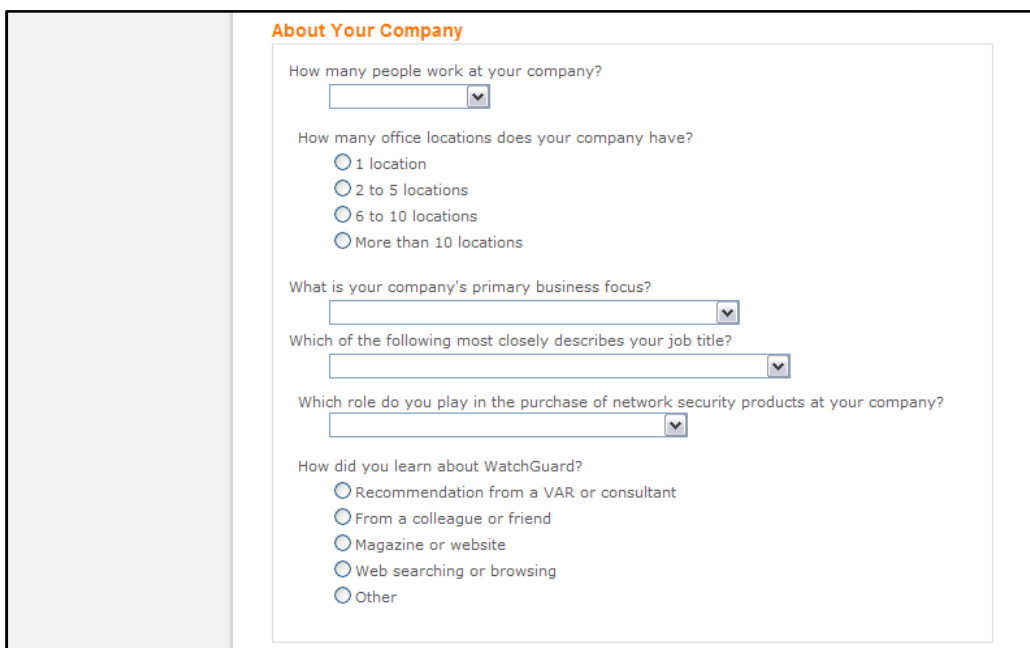

**About Your Company**

How many people work at your company?

How many office locations does your company have?  
 1 location  
 2 to 5 locations  
 6 to 10 locations  
 More than 10 locations

What is your company's primary business focus?

Which of the following most closely describes your job title?

Which role do you play in the purchase of network security products at your company?

How did you learn about WatchGuard?  
 Recommendation from a VAR or consultant  
 From a colleague or friend  
 Magazine or website  
 Web searching or browsing  
 Other

**User Name and Password** (ユーザー名&パスワード) のセクションでは、次の情報を入力して下さい。

User Name (ユーザー名)

Password (パスワード)

Confirm password (パスワードの確認)

注意：パスワードは、6文字から15文字以内の文字列にして下さい。


Security question (セキュリティ用の質問)

Security answer (上記質問の回答)

ウォッチガードによる、新しいリリース情報やスペシャル・プロモーションなどの通知を希望する場合は、

**Continue** (続行) の上にあるボックスをチェックして下さい。

**Continue** (続行) をクリックして次のステップに進みます。

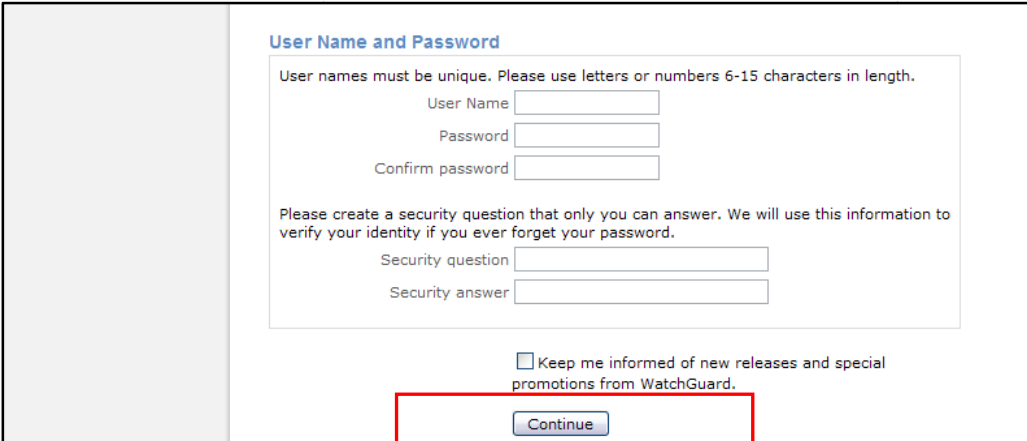

**User Name and Password**

User names must be unique. Please use letters or numbers 6-15 characters in length.

User Name

Password

Confirm password

Please create a security question that only you can answer. We will use this information to verify your identity if you ever forget your password.


Security question

Security answer

Keep me informed of new releases and special promotions from WatchGuard.

## STEP 4

このページは、ユーザー情報のセクションで入力したメール・アドレスに確認のメールが送信されたことをお知らせしています。

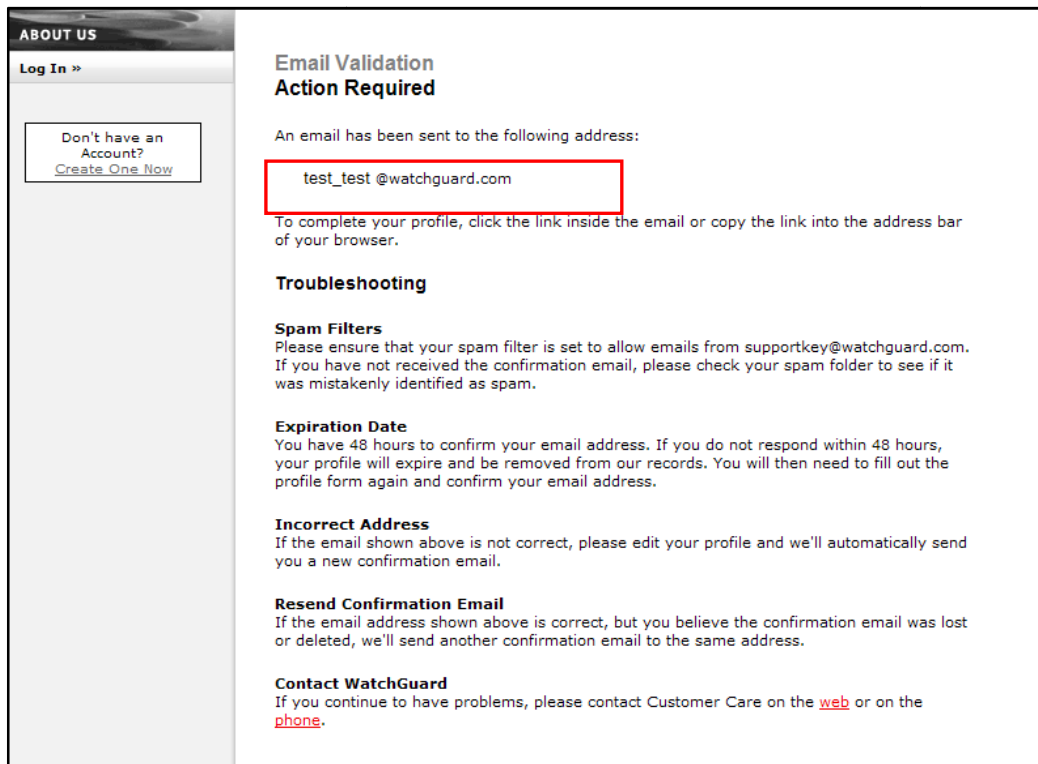

The screenshot shows a web page with a left sidebar and a main content area. The sidebar contains a 'Log In »' link and a button that says 'Don't have an Account? Create One Now'. The main content area is titled 'Email Validation Action Required' and contains the following text:

An email has been sent to the following address:

**test\_test @watchguard.com**

To complete your profile, click the link inside the email or copy the link into the address bar of your browser.

**Troubleshooting**

**Spam Filters**  
Please ensure that your spam filter is set to allow emails from supportkey@watchguard.com. If you have not received the confirmation email, please check your spam folder to see if it was mistakenly identified as spam.

**Expiration Date**  
You have 48 hours to confirm your email address. If you do not respond within 48 hours, your profile will expire and be removed from our records. You will then need to fill out the profile form again and confirm your email address.


**Incorrect Address**  
If the email shown above is not correct, please edit your profile and we'll automatically send you a new confirmation email.

**Resend Confirmation Email**  
If the email address shown above is correct, but you believe the confirmation email was lost or deleted, we'll send another confirmation email to the same address.

**Contact WatchGuard**  
If you continue to have problems, please contact Customer Care on the [web](#) or on the [phone](#).


## STEP 5

数分後に、次のようなメールが届きます。メールの件名は Validate Your WatchGuard Profile（ウォッチガード・プロフィールを確認して下さい）です。メールを開き、メール本文にあるリンクをクリックし、次のステップに進んで下さい。

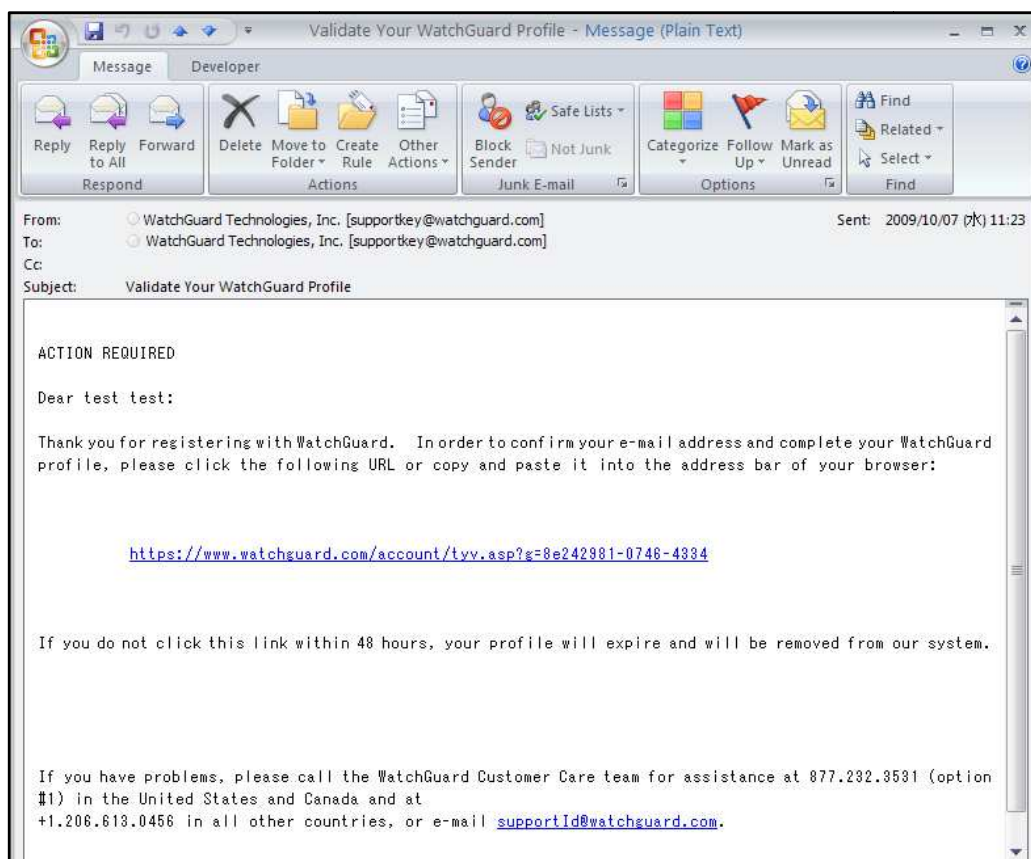


## STEP 6

リンクをクリックすると、次のようなページが表示されることがあります。その場合は、プロフィール登録が完了するまで、そのままお待ちください。

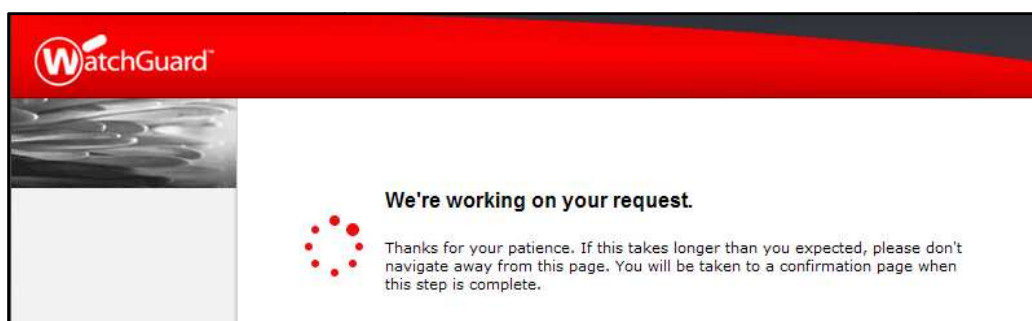



## STEP 7

次のページが表示されたら、プロフィール登録が完了です。**CONTINUE**（続行）をクリックしてください。

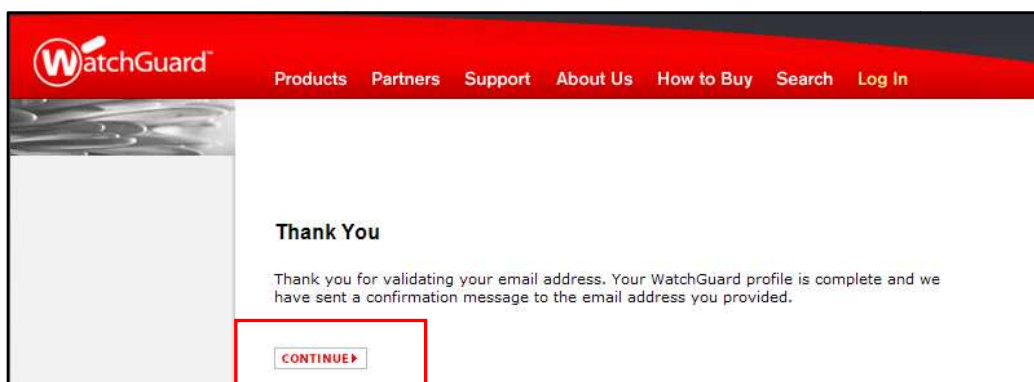

## STEP 8


Your WatchGuard Profile という件名のメールが届きますので、内容をご確認ください。また、画面は 2 番目の画像に切り替わります。次のステップでは、製品の登録方法に進みます。

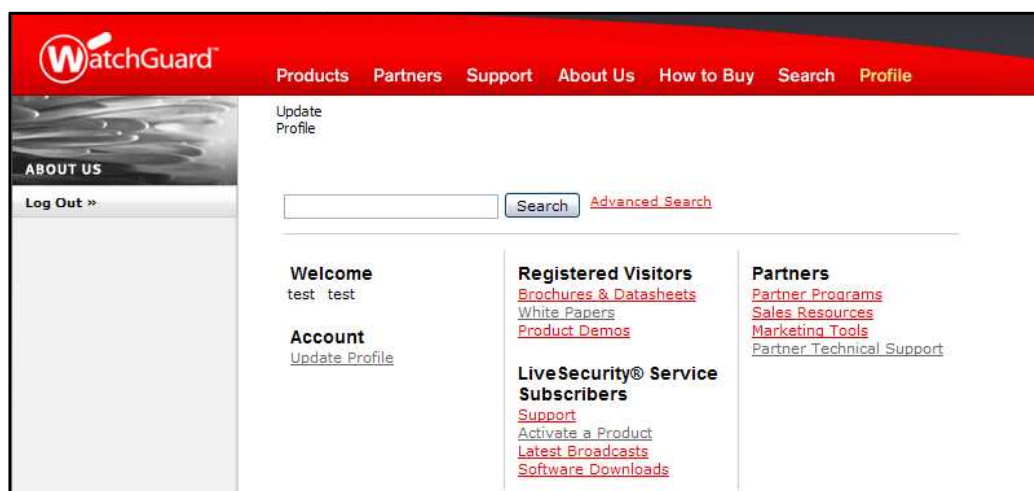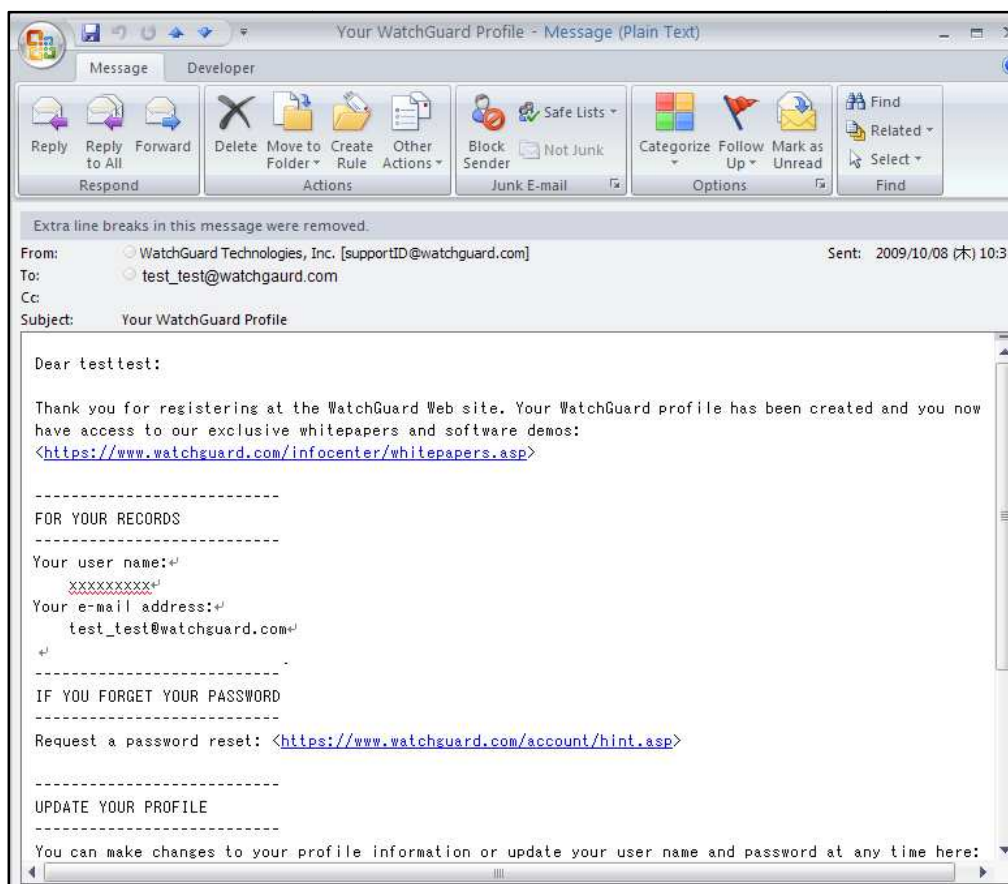

## 2. 製品を登録するには？

### STEP 1

http://www.watchguard.com/activate にアクセスし、ログインします。

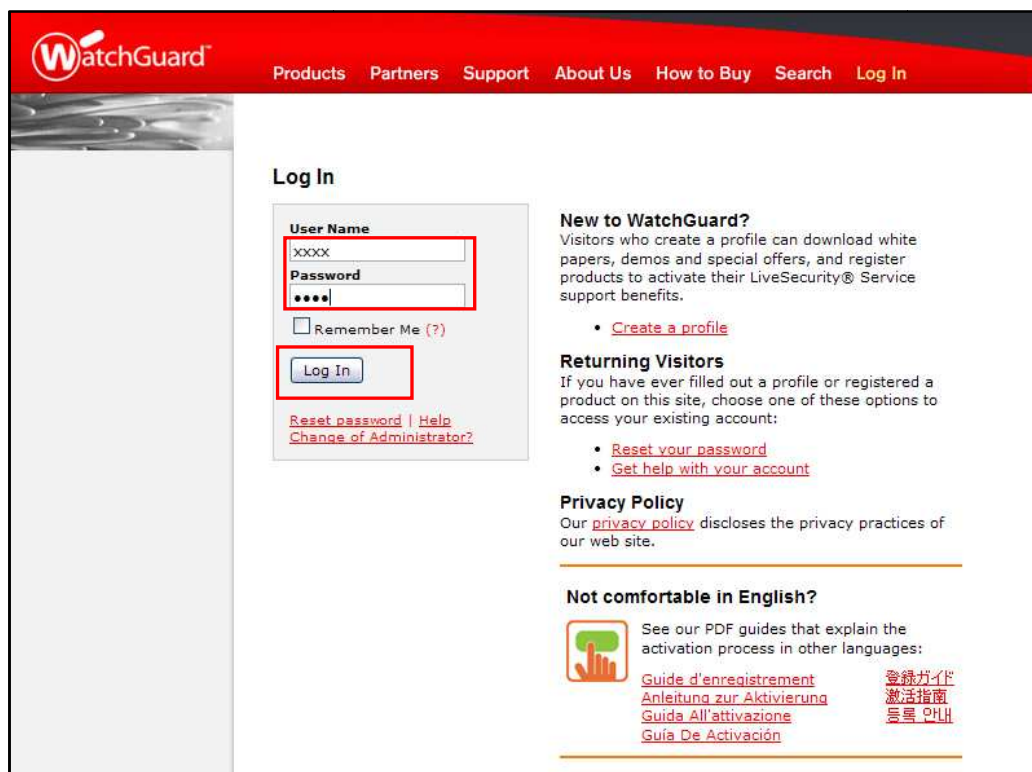

## STEP 2

シリアル番号をコピーし、空欄に貼り付けます。**CONTINUE**（続行）をクリックし、次のステップに進んで下さい。

The screenshot displays the WatchGuard user interface for activating products. At the top, the WatchGuard logo is on the left, and a navigation bar contains links for Products, Partners, Support, About Us, How to Buy, Search, and Profile. Below this, a secondary menu includes LiveSecurity® Service, Manage Products (which is selected), Account Options, Software Downloads, Online Tools, Alerts & Advice, and Online Store. A sidebar on the left lists various service options like 'Your Activated Products', 'Activation Center', 'Feature Keys', etc. The main content area features a help section with a hand icon and links to PDF guides in English, German, Italian, and Spanish. The primary task is to 'Activate Products' by entering a 'Serial Number or License Key'. A text input field contains the placeholder 'B0Exxxxxx-xxxx', and a red 'CONTINUE' button is positioned below it.

## STEP 3

入力されたシリアルから、該当の製品型番を表示しています。念のため、間違いがないかご確認ください。

また、**Set Device Information** では、管理しやすい名前を製品につけることができます。（オプション）

**Next** で次のページに進んでください。（**Previous** で前のページに戻ることも可能です）

The screenshot shows the WatchGuard web interface for activating a product. The top navigation bar includes links for Products, Partners, Support, About Us, How to Buy, Search, and Profile. The main content area is titled "Activate a Product" and displays the product being activated: "XC S 770 and 1-yr Email Security Bundle". Below this, the "Set Device Information" section is visible, with a text input field containing the friendly name "xcs770\_FC26". To the right of the input field, there is a note: "So you can easily identify this appliance later." At the bottom right of the page, there are two buttons: "« Previous" and "Next »". The "Next »" button is highlighted with a red box.

## STEP 4

セクション 1 で登録されたメールアドレスが表示されています。変更がある場合は、**(change)**をクリックしてください。

変更がなければ、**End-User License Agreement** をご確認の上、同意される場合は、チェックボックスにチェックの上、**Next** で次に進んでください。

### End-User License Agreement

Please note that this End-User License Agreement may be different from any prior End-User License Agreement you agreed to when activating a subscription service or a prior renewal, and will supersede any such prior agreement.

**IMPORTANT - READ CAREFULLY BEFORE ACCESSING WATCHGUARD SOFTWARE:**

This WatchGuard Product (the "PRODUCT") End-User License Agreement ("AGREEMENT") is a legal agreement between you (either an individual or a single entity) and WatchGuard Technologies, Inc. ("WATCHGUARD") for the WATCHGUARD Product, (including any product trade-ups for this PRODUCT) that accompanies this EULA, which includes software, computer software components (whether installed separately on a computer workstation or on the WATCHGUARD hardware product (THE "HARDWARE PRODUCT") and may include associated media, printed materials, and on-line or electronic documentation, and any updates or modifications thereto, (the "SOFTWARE PRODUCT"). WATCHGUARD is willing to license the SOFTWARE PRODUCT to you only on the condition that you accept all of the terms contained in this Agreement for the HARDWARE PRODUCT that accompanies this EULA and for future PRODUCT trade-ups. Please read this Agreement carefully. By installing or using the SOFTWARE PRODUCT you agree to be bound by the terms of this Agreement. If you do not agree to the terms of this AGREEMENT, WATCHGUARD will not license the SOFTWARE PRODUCT to you, and you will not have any rights in the SOFTWARE PRODUCT. In that case,

## STEP 5

**Feature Key** をクリックし、コピー&ペーストで Feature Key を取得してください。

Feature Key が有効化されるまで、製品の登録は完了していません。Feature Key の有効化については、23 ページの「フィーチャー・キーを使用するには?」セクションでご案内します。**Finish** で次の画面に進みます。

**Activate a Product**

Activating: XCS 770 and 1-yr Email Security Bundle  
"xcs770\_FC26"

**Retrieve and Apply Key**

Your activation is not complete until you apply your feature key!

Follow the instructions below to add the feature key to your XCS appliance, using the web user interface:

1. Open the **Administration** tab of the WatchGuard XCS user interface
2. Select **System > Feature Key**
3. Select the option to **Get Feature Key**

**NOTE:** if your XCS appliance does not have an internet connection, manually copy the **feature key** to the appliance using the Update option in the Feature Key menu.  
[Need detailed instructions?](#)

**Finish!**

Copy and paste everything below into the feature key dialog box . Click anywhere in the window to select all of the text.

```
Serial Number: BOE40002BPC026
License ID: BOE40002BPC026
Name: 07-05-2010_18:13
Model: XCS770
Version: 1
Feature: ATTACHMENT_CONTROL@Jul-05-2011
Feature: CENTRALIZED_MANAGEMENT
Feature: CLUSTERING
Feature: CONTENT_RULES_EMAIL@Jul-05-2011
Feature: CONTENT_SCANNING@Jul-05-2011
Feature: DOCUMENT_FINGERPRINTING_EMAIL@Jul-05-2011
Feature: EMAIL
Feature: KASPERSKY@Jul-05-2011
Feature: LIVESECURITY@Jul-05-2011
Feature: OCF_EMAIL@Jul-05-2011
Feature: OUTBREAK_CONTROL@Jul-05-2011
Feature: QUEUE_REPLICATION
Feature: REPUTATION_AUTHORITY@Jul-05-2011
Expiration: never
Signature: 302d021502c3ffd2-2eff6f6a8b0c5886-35c08db33b0c80ed-0502144413d0252e-
```

## STEP 6

各ライセンスの有効期限をご確認ください。登録する機器が他にある場合、**Activate More** をクリックし、STEP 2 に戻ってください。


The screenshot shows the WatchGuard user interface. At the top, there is a navigation bar with links for Products, Partners, Support, About Us, How to Buy, Search, and Profile. Below this, there are several menu items including LiveSecurity® Service, Manage Products, Account Options, Software Downloads, Online Tools, Alerts & Advice, and Online Store. The main content area is titled 'Activate a Product' and displays a green confirmation message: 'Hooray! Activation is complete!' and 'You activated: XCS 770 and 1-yr Email Security Bundle'. Below this, a table lists the activated services and their expiration dates. A red box highlights the 'Activate More' button.

Services:	Expiration
LiveSecurity Plus Subscription -- 1-Year	05 Jul 2011
Email Security -- 1-Year	05 Jul 2011

### 3. ライセンス・キーを有効化するには？

#### STEP 1

http://www.watchguard.com/activate にアクセスし、ログインします。

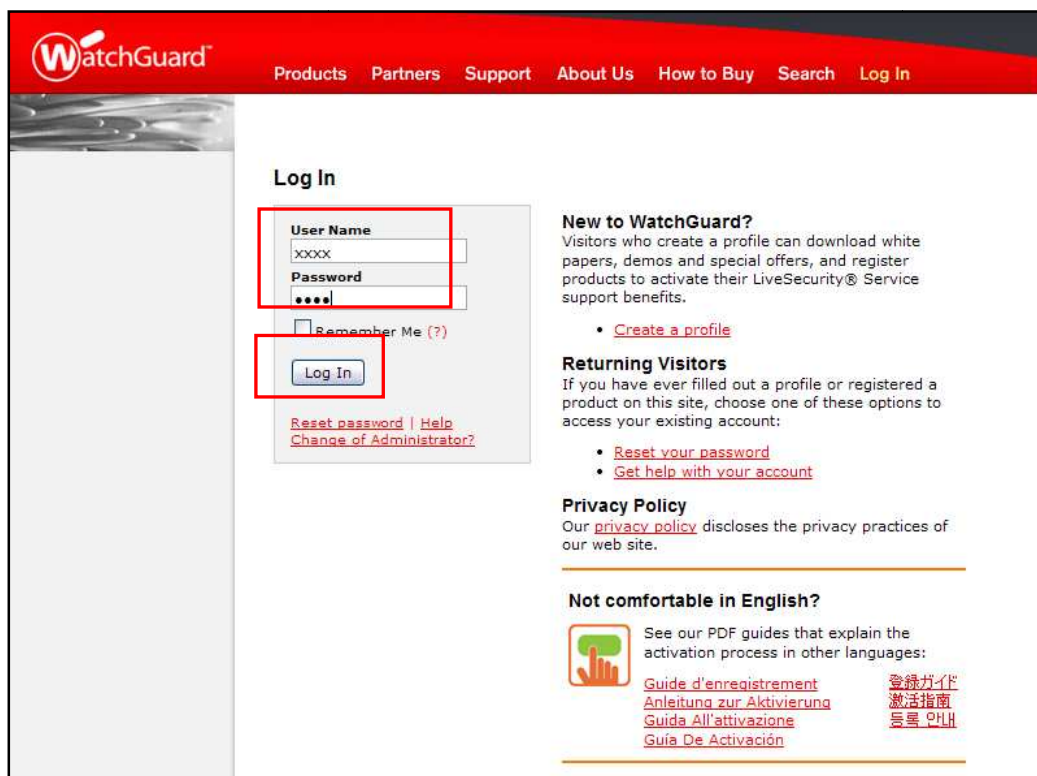

## STEP 2

ライセンス・キーをコピーし、空欄に貼り付けます。**CONTINUE**（続行）をクリックし、次のステップに進んで下さい。

The screenshot shows the WatchGuard activation interface. At the top, there is a navigation bar with the WatchGuard logo and links for Products, Partners, Support, About Us, How to Buy, Search, and Profile. Below this, there is a secondary navigation bar with links for LiveSecurity® Service, Manage Products, Account Options, Software Downloads, Online Tools, Alerts & Advice, and Online Store. The main content area is titled 'LIVESECURITY® SERVICE' and includes a sidebar with links for 'Your Activated Products', 'Activation Center', 'Feature Keys', 'Retired Products', 'Customer Renewal Tool', 'Product Documentation', and 'Log Out »'. The main content area has a section titled 'Need help? We've put together PDF guides to the activation process:' with links for 'Guide d'enregistrement', 'Anleitung zur Aktivierung', 'Guida All'attivazione', and 'Guía De Activación'. Below this, there is a section titled 'Activate Products' and 'Enter Serial Number or License Key'. It contains a text input field with the value 'FBX750ERNWL-1-012345-E6789XXXX' and a 'CONTINUE' button.

## STEP 3

ライセンスを適用するアプライアンスをプルダウンより選択してください。

**End-User License Agreement**をご確認ください。下記をご参考の上、チェックボックスにチェックを入れ、**Activate**（有効化する）で次に進んでください。

### I have read and I accept the End-User License Agreement

（エンドユーザー使用許諾契約を読んだ上で同意します）

### I decline the End-User License Agreement

（エンドユーザー使用許諾契約を拒否します）

\* 拒否された場合、ライセンスの有効化はできません。

The screenshot shows the WatchGuard activation interface. At the top, there is a navigation menu with links for Products, Partners, Support, About Us, How to Buy, Search, and Profile. Below this, there are links for LiveSecurity® Service, Manage Products, Account Options, Software Downloads, Online Tools, Alerts & Advice, and Online Store. A sidebar on the left lists 'Your Activated Products', 'Activation Center', 'Feature Keys', 'Retired Products', 'Product Documentation', and 'Log Out »'. The main content area features a 'Manage Products' section with the heading 'Choose Product to Upgrade'. It shows 'You are activating: Firebox® X750e 1-Year LiveSecurity® Renewal' and a dropdown menu for 'Which product do you wish to upgrade or renew?' set to 'FB X750e LG-FW'. Below this, there is a section for 'LiveSecurity® Service' with a warning to read the End-User License Agreement. Two radio buttons are present: 'I have read and I accept the End-User License Agreement' (which is selected and highlighted with a red box) and 'I decline the End-User License Agreement'. At the bottom, there is an 'ACTIVATE' button, also highlighted with a red box.

## STEP 4

Feature Key が表示されますので、コピー & ペーストで取得してください。取得した Feature Key の使用方は、次のセクションを参照してください。

**Finish** をクリックし、作業を完了します。

**Product Documentation**  
Log Out »

### Manage Products

#### Retrieve Feature Key

Your upgrade has been successfully activated. Next, update the feature key on your device to unlock its functionality.

**Appliance Feature Key**  
Copy the complete text in the box below exactly as shown, then paste it into the *Licensed Features* window from the *Setup* menu in Policy Manager, or save it as a text file. This feature key is required during initial set-up of your appliance. Need help? [Detailed instructions](#) are available.


```

Serial Number: 90xxxxxx-xxxx
License ID: 90xxxxxxxxxx
Name: Created Mar-16-2010 01:02
Model: X750e
Version: 1
Feature: 3DES
Feature: INTERFACE#8
Feature: FW_SPEED#0
Feature: VPN_SPEED#50
Feature: AV_SPEED#20
Feature: SESSION#75000
Feature: AUTHENTICATED_USER#1000
Feature: AUTH_DOMAIN#5
Feature: FW_RULE#0
Feature: BOVPN_TUNNEL#100
Feature: MUVPN_USER#50
Feature: FIREWARE
Feature: AV@Dec-07-2011
Feature: AV_UPDATE@Dec-07-2011
Feature: IPS@Dec-07-2011
Feature: IPS_UPDATE@Dec-07-2011
Feature: SPAMBLOCKER@Dec-07-2011;UC17Q63WEU2Q2UGD54HB
Feature: WEBBLOCKER@Dec-07-2011
Feature: FW_PRO
Feature: LIVESECURITY@Dec-07-2011
Feature: MODEL#750e
Expiration: never
Signature: f9c8-8ffe-03c0-b894
    
```

**FINISH ▶**

## STEP 5

更にライセンスキーの有効化を行う場合には、 **Activate another license key** をクリックし、STEP 2 に戻ります。

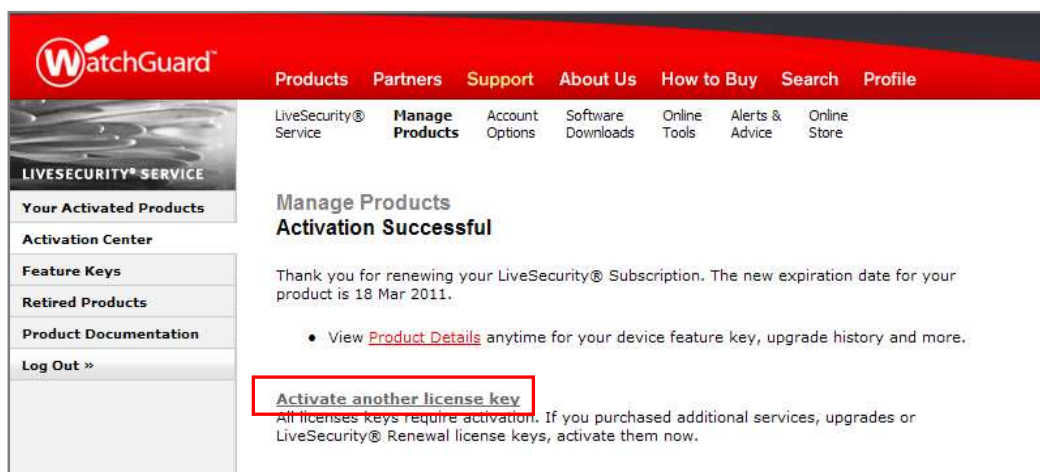

## 4. フィーチャー・キーを使用するには？

---

1. ポリシーマネージャを開き、Feature Key を追加したいアプライアンスを選んでください。
2. **Setup>Feature Key** を選択します。



3. **Add** をクリックすると、The Add Firebox Feature Key ダイアログボックスが開きます。



- 4 取得した Feature Key をボックス内にコピー & ペーストし、OK をクリックして変更を保存してください。



## 5. クイックセットアップガイド

### I : デバイスへの接続


1. パッケージを開封し、各内容物を取り出します。
2. 電源ケーブルを本体に接続します。
3. LAN ケーブルを NIC 1 に接続します。

下記図、左側が NIC 1 です。



4. 下記の手順に従って、WebUI にてセットアップウィザードを行ないます。

- セットアップ用の C を下記の図のように、XCS と接続可能なネットワークに接続します。

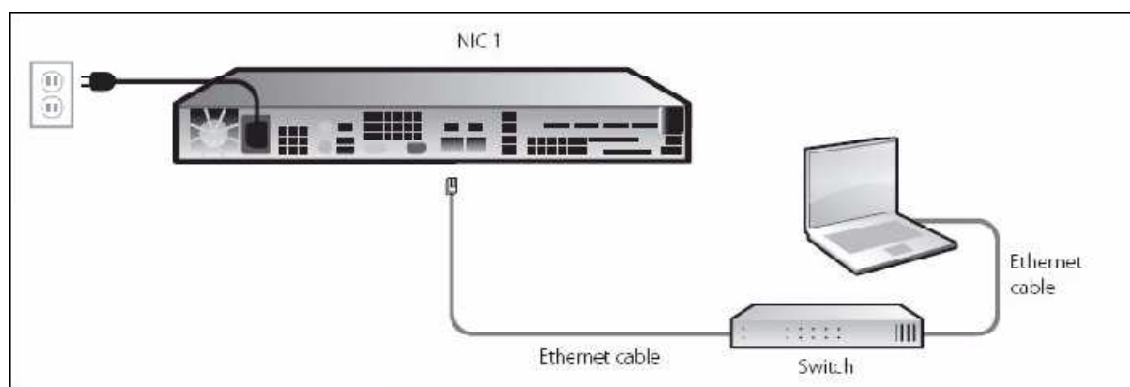

※必要な場合はクロスケーブルを使用してください。

## Ⅱ：デフォルトネットワークセッティング

XCS のデフォルトネットワークセッティングは (NIC1) 下記の様になっています。

- IP アドレス: 10.0.0.1
- ネットマスク: 255.255.255.0
- ゲートウェイ: 10.0.0.2

接続するための PC の設定を上記のアドレスにアクセスできるよう、固定アドレスで設定します。

XCS の WebUI では下記のブラウザをサポートしてます。

- Internet Explorer 7 (Windows XP, Windows 2000, Windows 2003, Windows Vista, Windows 7)
- Internet Explorer 8 (Windows XP, Windows 2000, Windows 2003, Windows Vista, Windows 7)
- Firefox 3 以上 (Windows, Linux, Mac)

スクリーンの解像度は最低 1024x768 以上必要です。

## Ⅲ：インストールウィザード

※ウィザードを始める前に、XCS のライセンスキーを取得していることを確認してください。

取得方法はこのマニュアルのアクティベーション編を参考にしてください。なお、設定する際に使用できる文字は英数小文字のみとなります。また特殊文字は使用しないで下さい。

1. XCS の電源を投入します。

Ping を XCS のアドレス 10.0.0.1 に打ち続けると XCS からの応答が得られるようになります。

(Version9.1 ではデフォルトで Ping の応答が得られるようになっています。) Ping の応答が得られるようになってから約 5 分後、ブラウザでアクセスできるようになります。

2. ブラウザを起動し、<https://10.0.0.1> へアクセスします。すると、ログインページが表示されます。

(証明書のエラーが表示されますが、特に問題ないので、各ブラウザの操作方法によって証明書を受け入れます。)

3. デフォルトの **Username** : ユーザー名 、 **Password** : パスワードを入力します。


デフォルト設定は下記の様になっています。

Username : admin

Pasword : admin



4. インストレーションウィザードのページが表示されるので、 **Continue** をクリックし、ウィザードをスタートします。

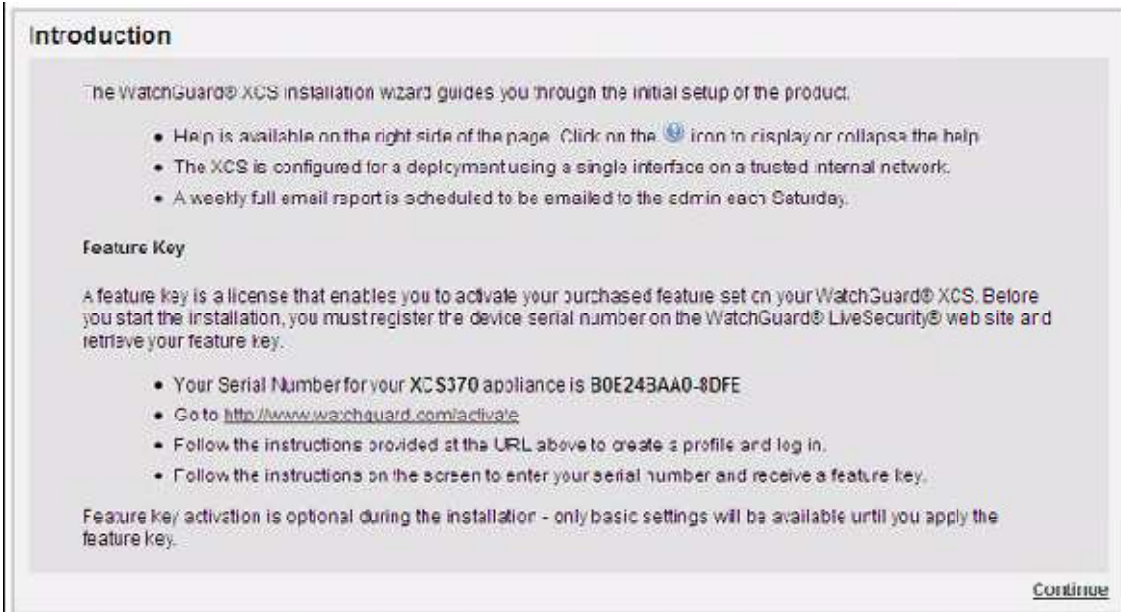

5. **Regional Settings** (地域設定) ページにて下記の設定を行います。

**Time Settings** — (日付、時間設定) フォーマットを 24 時間表記、hh:mm:ss で設定します。 .

日付は YYYY-MM-DD で設定します。

- **Time Zone** — (タイムゾーン) タイムゾーン、都市を選択します。
- **Keyboard**— (キーボード) 使用している PC のキーボードタイプを選択します。

6. **Continue** をクリックします。


7. 次に表示される **Networks Settings** (ネットワークセッティング) ページで、ネットワークの設定を行います。ここでは、NIC 1 の設定になります。

各項目は以下の通りです。:

- **Hostname** — (ホスト名) XCS のホスト名を設定してください。
- **Domain** — (ドメイン名) ドメイン名を設定してください。
- **Gateway** — (ゲートウェイ) ネットワークのゲートウェイを設定してください。

- **Name Server** — (ネームサーバー、DNS サーバー) DNS サーバーを設定してください。
- **Name Server 2** — (ネームサーバー、DNS サーバー) セカンダリ DNS サーバーを設定してください。
- **NTP Server** — (NTP サーバー) NTP サーバーを設定してください。
- **IP Address** — (IP アドレス) XCS に設定する IP アドレスを設定してください。
- **Netmask** — (ネットマスク) サブネットマスクを設定してください。
- **External Proxy Server** — (外部プロキシサーバー) XCS が正常に稼動するには必ずインターネット接続が必要です。もしも XCS の外部アクセス用のネットワークにプロキシサーバーが存在する場合、この項目を “Enabled” に設定することで、認証設定を行なうことが可能です。特にプロキシサーバーが存在しない場合、“Disabled” のままで、特に設定の必要はありません。

下記プロキシサーバー設定。

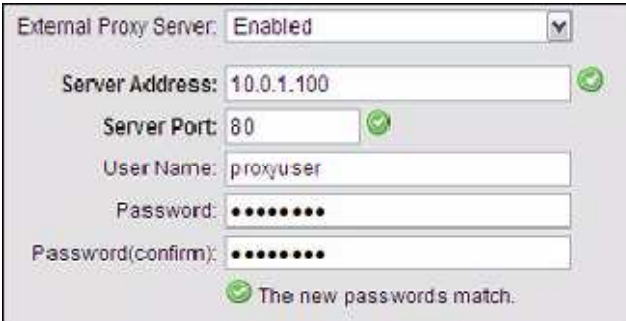

- **Server Address** — (サーバーアドレス) 外部プロキシサーバーの IP アドレスを設定してください。
- **Server port** — (サーバーポート) プロキシで設定されているポートを指定してください。
- **User Name** — (ユーザー名) 認証用のユーザー名を設定してください。
- **Password** — (パスワード) 認証用のパスワードを設定してください。

8.上記までの設定が完了したら、**Continue** を選択し、次へ進みます。

※ここまでの設定でネットワーク設定を変更した場合、正常に XCS へ接続できるよう、PC の設定を変更し、場合によっては ARP をクリアしてください。

9. **Customer Information** ページでは下記の設定を行います。

**Organization Name** : (組織名) XCS を設置する先の組織名を設定します。

**Server Admin Email** : (管理者用メールアドレス) XCS よりのアラート、通知メールを受信する管理者用メールアドレスを設定します。

10. 設定したら、**Continue** をクリックします。

11. **Change Password** ページでは、新しい XCS へログインするための管理者用パスワードを設定します。

12. 設定したら、**Continue** をクリックします。

13. **Feature Key** ページでは下記を選択し、各設定を行ないます。

- Update** : ライセンスを追加します。最初に準備したライセンスキー ( Featurekey ) をペーストし、**Apply** を選択します。
- Get Feature Key** : 有効なインターネットアクセス可能な環境に XCS がセットアップされている場合、この項目を選択することで、ライセンスサーバーより自動的にキーをダウンロードします。有効なインターネットアクセスが利用できない場合、この機能は使用できません。
- Enter Feature Key Later** : ウィザード内ではキーを投入せずに、後ほど手動で適応させる場合、選択します。

※ WebUI メニュー、**Administration > System > Feature Key** より投入可能です。

### Feature Key

Appliance Model: XCS370 Update

Appliance Serial: B0E24BAA0-8DFE Get Feature Key

[Enter Feature Key Later](#)

14. **Mail Configuration** ページでは、メールドメイン、インターナルメールサーバーの IP アドレス等を設定します。

### Mail Configuration

Email Domain:  ⓘ

Internal Mail Server:

**Security Settings**

Intercept Anti-Spam:  ▼

Anti-Virus:  ▼

Attachment Control:  ▼

[Continue](#)

□ **Email Domain** : ドメインを設定します。

□ **Internal Mail Server** : インターナルメールサーバーの IP アドレスを設定します。

※XCS は自動的にメールルートを設定します。もしも、他のドメインを追加したい場合、

セットアップ後、Web UI メニューより、 **Configuration > Mail > Routing** の項より追加可能です。

15. **Security Settings** : この項では、各セキュリティ機能の設定を行ないます。ここで行なわれる設定は Enabled : 有効にする、Disabled : 無効にするの 2 種類です。

各項目のデフォルト設定は下記を参考にしてください。

**Intercept Connection Control Anti-Spam:**

Reject on ReputationAuthority Reputation Enabled

(Threshold: 90)

Reject on infection (ReputationAuthority) Enabled

Reject connections from dial-ups (ReputationAuthority) Off

Reject on DNSBL Off

Threat Prevention Enabled

Reject on unknown sender domain Enabled

Reject on missing sender MX Off

Reject on non FQDN sender Enabled

Reject on unauth pipelining Enabled

Reject on missing addresses Off

Reject on missing reverse DNS Off

Certainly Spam Reject

(Threshold: 99)

Probably Spam Modify Subject

Header

(Threshold: 90)

Maybe Spam Just Log

(Threshold: 60)

Decision Strategy Heuristic 1

Spam Words Enabled

Mail Anomalies Enabled

DNS/URL Block List Enabled

ReputationAuthority Enabled

Token Analysis Enabled

SPF Enabled

DomainKeys Enabled

Backscatter Off

16. 設定が完了したら、**Continue** を選択します。


17. **Email Traffic** の項では、ドロップダウンリストより、**Enabled** を選択することで、インストールウィザードの最終設定を行ないます。もしも、ここで **Disabled** を選択すると、ウィザードが完了した後、WebUI メニュー、**Activity > Status > Status/Utility** より、変更することが可能です。



18. 設定が完了したら、**Continue** を選択します。

19. 表示されたページで、**Done** を選択すると、インストールウィザードは完了です。

クリックした後に 5 分弱で設定がおこなわれ、WebUI のダッシュボード画面に切り替わります。

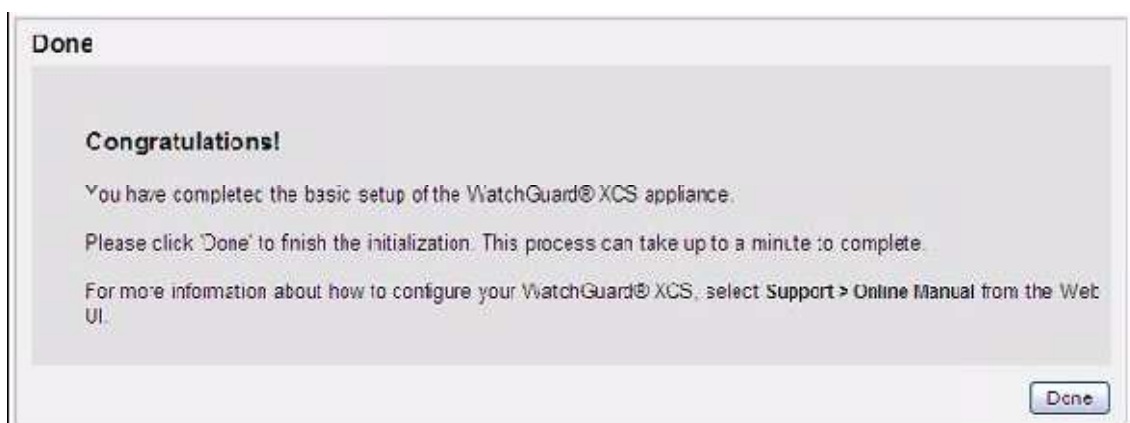

### メインダッシュボード画面

